


- |   |
|---|
| 1. QUAD-LOCK REGULAR 2.25" PANEL  |
| 2. QUAD-LOCK TIE (8" YELLOW SHOWN)  |
| 3. HORIZONTAL REINFORCEMENT AS SPECIFIED ALTERNATE AROUND VERTICAL BARS                       |
| 4. VERTICAL REINFORCEMENT AS SPECIFIED  |
| 5. REINFORCEMENT OVERLAP AS REQUIRED  |
| 6. CONCRETE CAVITY  |
| 7. QUAD-LOCK METAL TRACK - FASTEN TO TRACK BELOW @ 24" O.C.                                   |
| 8. SUSPEND FOOTING STRIP REINFORCEMENT W/ WIRE  |
| 9. FOOTING STRIP FORMWORK (DIMENSIONAL LUMBER OR PLYWOOD)                                     |
| 10. STAKES AT 24" O.C. MAX.   |
| 11. ALTERNATE DOWELS AS SHOWN SECURE TO INVERTED METAL TRACK AND QUAD-LOCK TIES               |
| 12. UNDISTURBED SOIL  |
| 13. INVERTED QUAD-LOCK TRACK CUT & BEND ENDS INSTALL AT 24" O.C. AND FASTEN TO CONTINUOUS 2x4 |

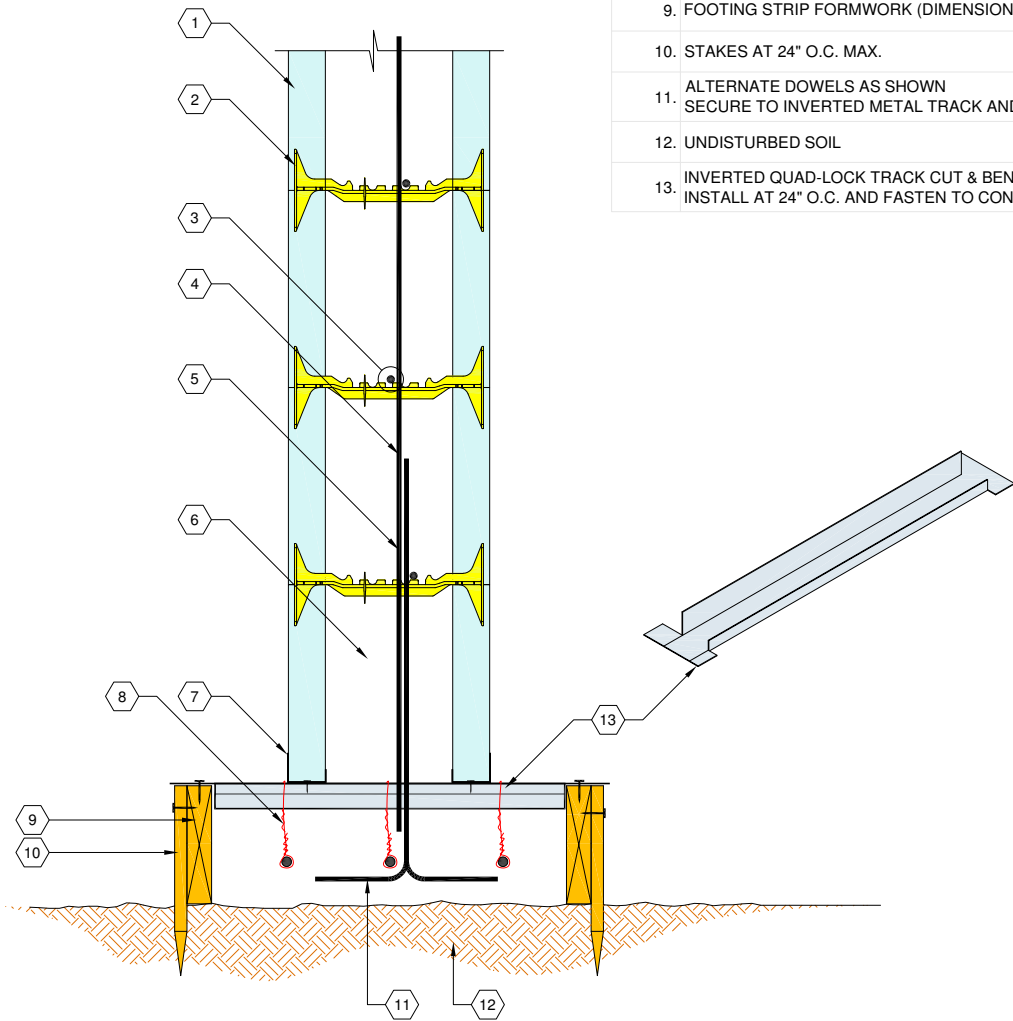

**QUAD-LOCK**  
Building Systems Ltd.

Quad-Lock Building Systems Ltd.  
7398 - 132nd Street  
Surrey, BC V3W 4M7  
Canada

888.711.5625 - Toll Free  
604.590.3111  
604.590.8412 - fax  
www.quadlock.com

IT IS THE RESPONSIBILITY OF THE USER TO COMPLY WITH ALL APPLICABLE REGULATIONS AND BUILDING CODE REQUIREMENTS CONCERNING THE USE OF THESE PRODUCTS.  
IT IS FURTHER THE RESPONSIBILITY OF THE USER TO RESEARCH AND UNDERSTAND SAFE METHODS OF USE AND HANDLING OF THESE PRODUCTS.

## MONOLITHIC POUR SETUP WOOD FORM

DATE:	2009-01-21	SCALE:	NOT TO SCALE
REVISION NO.:	R-03	CUSTOMER:	
REVISION DATE:	2018-05-28	SHEET SIZE:	8.5" x 11"
DRAWN BY:	Z. PROSTRAN	APPROVED BY:	G. KUSTERMANN
			DRAWING NO.:
			QL-116