


OPTION 1

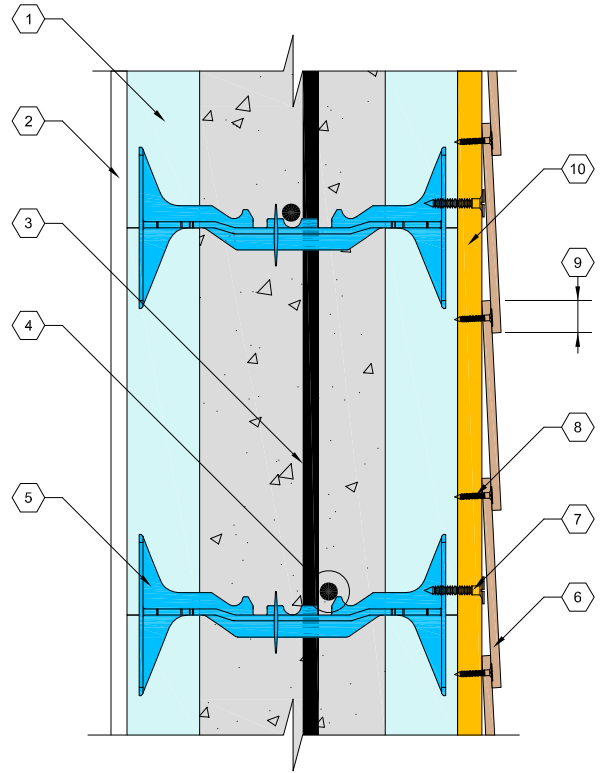

OPTION 2

1. QUAD-LOCK REGULAR 2.25" PANEL
2. EXTERIOR FINISH
3. VERTICAL REINFORCEMENT AS SPECIFIED
4. HORIZONTAL REINFORCEMENT AS SPECIFIED
5. QUAD-LOCK TIE (6" BLUE SHOWN)
6. SIDING PLANKS AS SPECIFIED
7. SIDING FINISH SCREWS EXTERIOR RATED SPACED @ 12" [305mm] O.C. HOR. & VERTICAL TO MATCH SIDING SIZE
8. MINIMUM SIDING LAP = 1" [25mm]
9. QUAD-LOCK FS 2.25" PANEL

1. QUAD-LOCK REGULAR 2.25" PANEL
2. EXTERIOR FINISH
3. VERTICAL REINFORCEMENT AS SPECIFIED
4. HORIZONTAL REINFORCEMENT AS SPECIFIED
5. QUAD-LOCK TIE (6" BLUE SHOWN)
6. SIDING PLANKS AS SPECIFIED
7. FASTEN FURRING STRIP TO QUAD-LOCK TIES SPACING @ 12" [305mm] O.C. VERT & HOR. WITH EXTERIOR RATED SCREWS
8. SIDING FINISH SCREWS EXTERIOR RATED SPACED @ 12" [305mm] O.C. HOR. & VERTICAL TO MATCH SIDING SIZE
9. MINIMUM SIDING LAP = 1" [25mm]
10. 1X2 OR 1X4 VERTICAL FURRING STRIP SPACED @ 12" O.C.



Quad-Lock Building Systems Ltd.
7398 - 132nd Street
Surrey, BC V3W 4M7
Canada

888.711.5625 - Toll Free
604.590.3111
604.590.8412 - fax
www.quadlock.com

IT IS THE RESPONSIBILITY OF THE USER TO COMPLY WITH ALL APPLICABLE REGULATIONS AND BUILDING CODE REQUIREMENTS CONCERNING THE USE OF THESE PRODUCTS.
IT IS FURTHER THE RESPONSIBILITY OF THE USER TO RESEARCH AND UNDERSTAND SAFE METHODS OF USE AND HANDLING OF THESE PRODUCTS.

LAPPED SIDING FINISH DETAIL

DATE:	2009-01-21	SCALE:	NOT TO SCALE
REVISION NO.:	R-02	PROJECT:	
REVISION DATE:	2009-07-10	CUSTOMER:	
DRAWN BY:	Z. PROSTRAN	APPROVED BY:	H.M.K. & D.J.B.
			DRAWING NO.:
			QL-606